

# CARRARA SILVER



**CARRARA SILVER**  
**A61710Y**  
Glazed Polished 60x120 / 23.6x47.2"



**CARRARA SILVER**  
**A61710Y**  
Glazed Polished 60x120 / 23.6x47.2"

# CARRARA SILVER

COLOR

---


## CARRARA SILVER






60x120 cm 23.6x47.2"

CARRARA SILVER  
PNF600174  
Natural 60x60 / 23.6x23.6"


# CARRARA SILVER




## SIZE

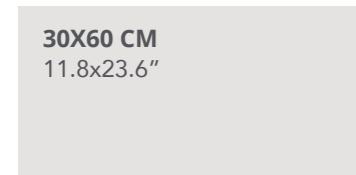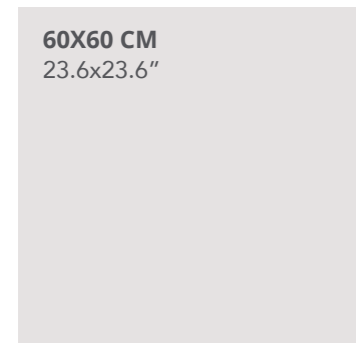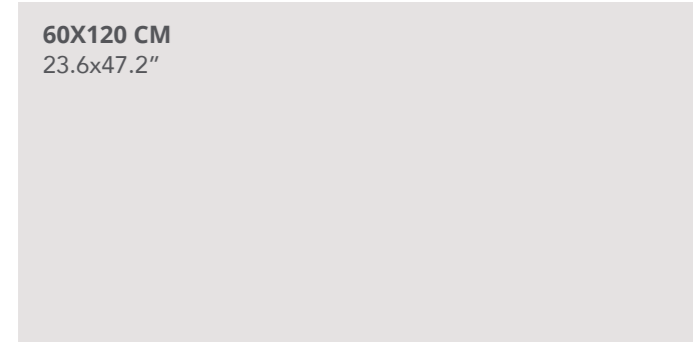

## FINISH



Glazed Polished



Natural

## PRODUCT SPECIFICATIONS

COLOR   SIZE FINISH	30x60 cm 11.8x23.6"	60x60 cm 23.6x23.6"	By Request	60x120 cm 23.6x47.2"	Regular	
CARRARA SILVER	Glazed Polished	PNA630174	PNA600174	•	A61710Y	•
	Natural	PNF630174	PNF600174	•	-	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
<b>30X60 CM</b> 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6
<b>60X60 CM</b> 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8
<b>60X120 CM</b> 23.6x47.2"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
<b>30X60 CM</b> 11.8x23.6"	S≥2000N / R≥38N/mm <sup>2</sup>	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
<b>60X60 CM</b> 23.6x23.6"	S≥2200N / R≥38N/mm <sup>2</sup>	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
<b>60X120 CM</b> 23.6x47.2"	S≥2600N / R≥40N/mm <sup>2</sup>	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M <sup>2</sup>	Pcs Per Box	Weight Per Box	Boxes Per PLT
<b>30X60 CM</b> 11.8x23.6"	5.56	7	27	40
<b>60X60 CM</b> 23.6x23.6"	2.78	4	32	32
<b>60X120 CM</b> 23.6x47.2"	1.39	2	38	48