

MADRID SILVER



MADRID SILVER
PNA610305Y

Glazed Polished 60x120 cm / 23.6x47.2"

MADRID SILVER
PNA610305Y

Glazed Polished 60x120 cm / 23.6x47.2"



MADRID SILVER

COLOR

MADRID SILVER

PNA610305Y




60x120 cm 23.6x47.2"





720° VR


MADRID SILVER




SIZE

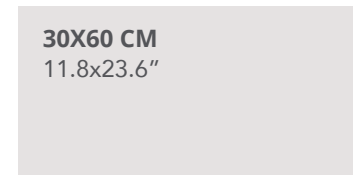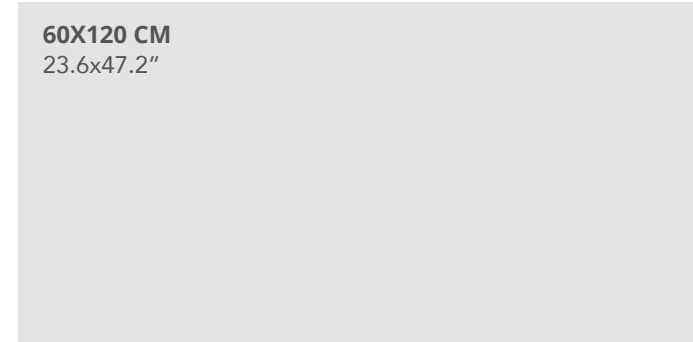


FINISH



Flamed Brushed



Glazed Polished



Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH	30x60 cm 11.8x23.6"	Anion	60x60 cm 23.6x23.6"	By Request	Anion	60x120 cm 23.6x47.2"	Regular	Anion
MADRID SILVER	Flamed Brushed	PNC630305	-	PNC600305	•	-	-	-
	Glazed Polished	PNA630305Y	•	PNA600305Y	•	•	PNA610305Y	•
	Natural	-	-	PNF600305	•	-	-	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8
60X120 CM 23.6x47.2"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
30X60 CM 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X120 CM 23.6x47.2"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM 11.8x23.6"	5.56	7	27	40
60X60 CM 23.6x23.6"	2.78	4	32	32
60X120 CM 23.6x47.2"	1.39	2	38	48