

MICA



ASPHALT GREY  
SF71017Y

Natural 75x150 / 29.5x59.1"

# MICA

COLOR \_\_\_\_\_

## IVORY

75x150 cm 29.5x59.1"

SF71011Y



720° VR

## STERLING GREY

75x150 cm 29.5x59.1"

SF71013Y



720° VR

## MOONSHINE GREY

75x150 cm 29.5x59.1"

SF71015Y




720° VR

COLOR \_\_\_\_\_

## ASPHALT GREY

SF71017Y

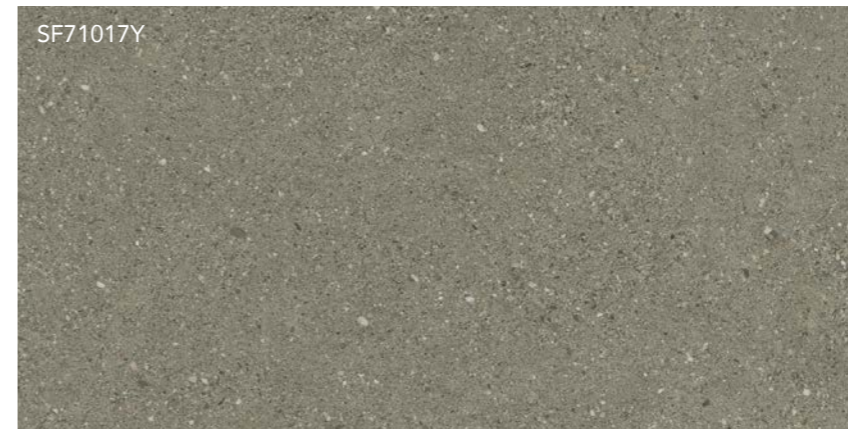

75x150 cm 29.5x59.1"




720° VR

DECOR \_\_\_\_\_

## RIDGE IVORY


SW75011T

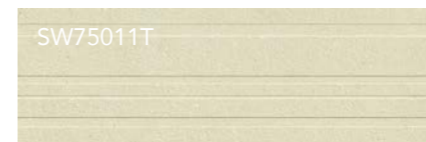

25x75 cm 9.8x29.5"

## RIDGE STERLING GREY


SW75013T

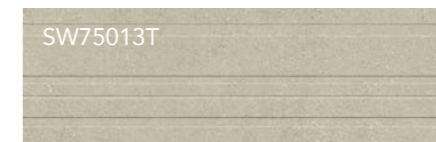

25x75 cm 9.8x29.5"


## RIDGE MOONSHINE GREY

SW75015T


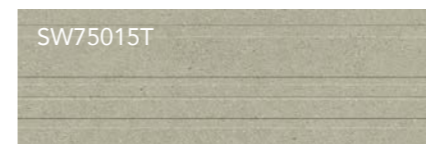


25x75 cm 9.8x29.5"


# MICA



## SIZE

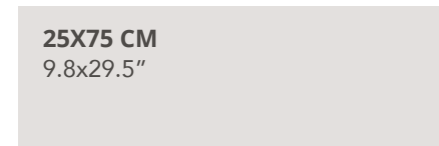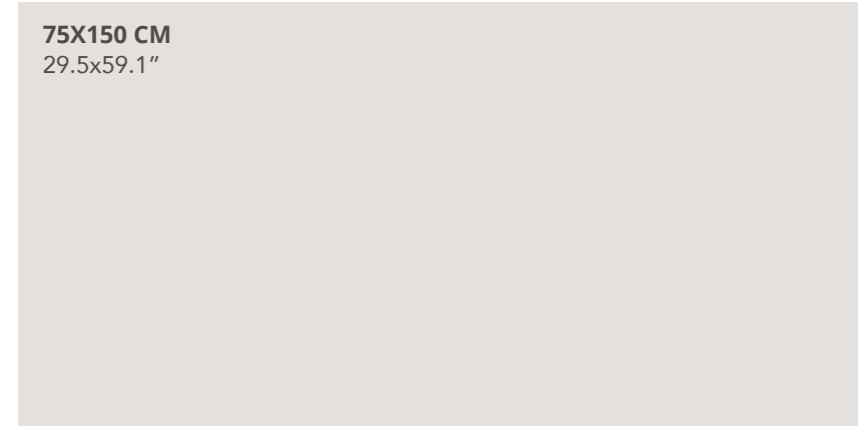

## FINISH



Natural

## PRODUCT SPECIFICATIONS

COLOR   SIZE FINISH		25x75 cm 9.8x29.5"	Regular	75x150 cm 29.5x59.1"	Regular	Anion
IVORY	Natural	SW75011	•	SF71011Y	•	•
STERLING GREY	Natural	SW75013	•	SF71013Y	•	•
MOONSHINE GREY	Natural	SW75015	•	SF71015Y	•	•
ASPHALT GREY	Natural	-	-	SF71017Y	•	•
RIDGE IVORY	Natural	SW75011T	-	-	-	-
RIDGE STERLING GREY	Natural	SW75013T	-	-	-	-
RIDGE MOONSHINE GREY	Natural	SW75015T	-	-	-	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	> 10	± 2.0	± 2.0	± 0.5	± 1.5	+2.0~-1.5	+2.0~-1.5	± 2.0	± 2.0
<b>25X75 CM</b> 9.8x29.5"	≤ 18	± 0.3	± 0.3	± 0.3	± 0.3	+0.6~-0.4	+0.5	± 0.8	± 0.8
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
<b>75X150 CM</b> 29.5x59.1"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+1.2~-0.8	+0.8~-0.6	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
<b>25X75 CM</b> 9.8x29.5"	S≥2000N / R≥18N/mm <sup>2</sup>	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm <sup>2</sup>	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
<b>75X150 CM</b> 29.5x59.1"	S≥2000N / R≥40N/mm <sup>2</sup>	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M <sup>2</sup>	Pcs Per Box	Weight Per Box	Boxes Per PLT
<b>25X75 CM</b> 9.8x29.5"	5.33	7	23	43
<b>25X75 CM</b> 9.8x29.5" (Decor)	5.33	6	20	43
<b>75X150 CM</b> 29.5x59.1"	0.89	2	58	15